



# COMBiLiFT

Customised Handling Solutions

**C10,000 - C12,000**

*making short work of long loads*



*forward/reverse mode*



*carousel mode*



*sideward mode*




**three machines in one**  
- counterbalance forklift - sideloader - aisle truck

[www.COMBiLiFT.COM](http://www.COMBiLiFT.COM)



# SPECIFICATIONS

## Model C10,000 - C12,000

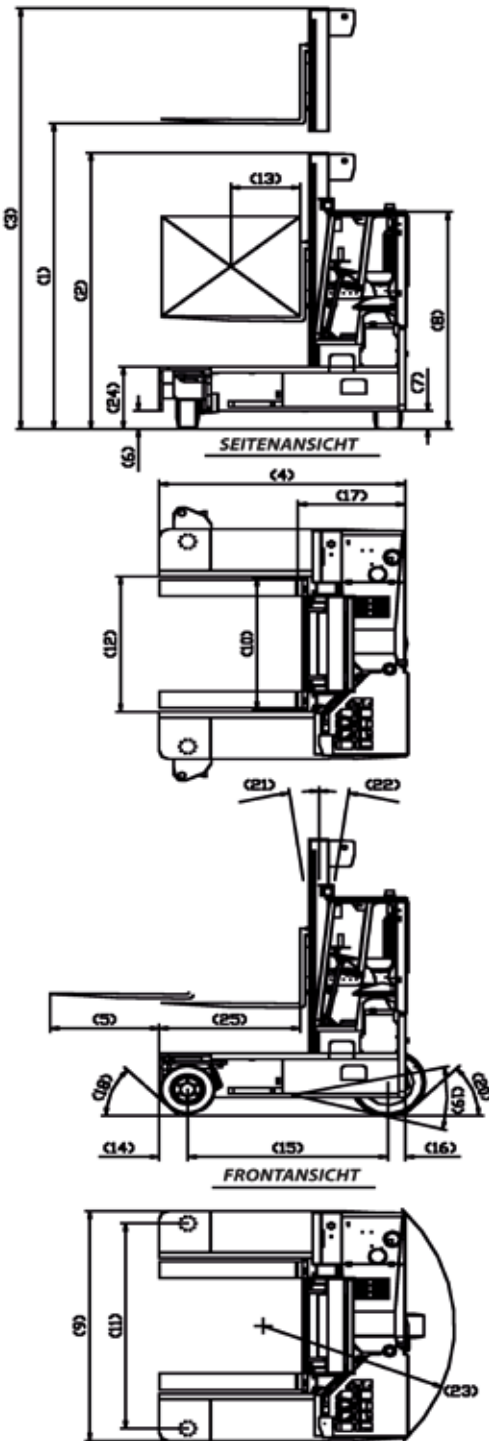

REF	DESCRIPTION	C10,000	C12,000
1a	Max. Lift Height	4100mm	
1b	Free Lift Height	0mm	
2	Height Mast Closed	3450mm	
3	Max.(Mast raised)	5800mm	
4	Overall Length	3070mm	
5	Mast Travel	1730mm	
6	Ground Clearance Under Mast	290mm	
7	Ground Clearance to Center of Wheelbase	165mm	
8	Height of Cab	2590mm	
9	Width	2800mm	
10	Outside Spread of Fork Arms	1600mm	
11	Track Front	2500mm	
12	Frame Opening	1650mm	
13	Load Center Distance	600mm	
14	Overhang Front	307mm	
15	Wheel Base	2555mm	
16	Overhang Back	208mm	
17	Length From Face of Fork	1380mm	
18	Approach Angle	45°	
19	Ramp Angle	29°	
20	Departure Angle	45°	
21	Forward Tilt	3°	
22	Backward Tilt	5°	
23	Minimum Outside Radius	3100mm	
24	Platform Height	710mm	
25	Platform Length	1690mm	
A	Capacity	10,000kg	12,000 kg
B	Unladen Weight	14,000kg	14,200kg
C	Maximum Ground Speed	14 km/h	
D	Gradability	15%	
E	Kubota V3300-TE Diesel/ 4.3ltr GM LPG	62kW / 72kW	
F	Electric's	12 Volt	
G	Fork Section	65 x 200 x 1690	
H	22x12x16 Front Tyre (Solid Rubber)	OD560 /Width305	
I	840 / 350-559 Rear Tyre (Solid Rubber)	OD840 /Width350	
J	Standard Color	Green & Grey	
K	Suspension Seat	KAB Model 211	

### FEATURES INCLUDE:

- Rubber Mounted Half Cabin with Top, Front, Side and Rear Glass
- Multi – Direction Operation
- 3 Wheel Hydrostatic Drive
- Load Sensing Steering
- 4 way lever Positioning of Wheels
- Hydraulic Oil Cooler

### Compare the options

	Outside	Inside	4-Way
<b>COMBiLiFT</b>	✓	✓	✓
4-Way Electric	x	✓	✓
Counterbalance	✓	✓	x
Side Loader	✓	x	x

### Distributed By

**COMBiLiFT Ltd**  
Co.Monaghan  
Ireland  
**Tel:** ++ 353 47 80500  
**Fax:** ++ 353 47 80501  
**info@combilift.com**